




Vision Master E290



2.90 E-ink Display with ESP32 and LoRa

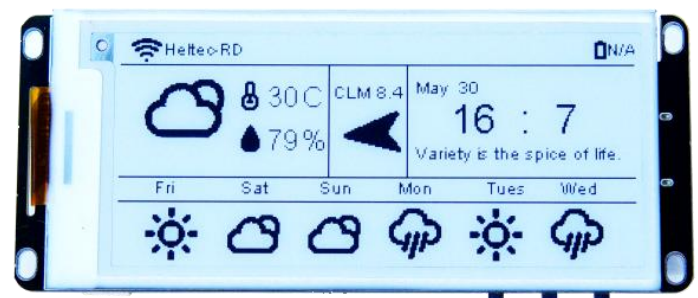

Document version

| Version | Time | Description | Remark |
|------------|-----------|---------------------|---------|
| Rev. 0.3.0 | 2024-5-16 | Preliminary version | Richard |
| Rev.0.3.1 | 2024-9-14 | Fixed Flash size | Richard |

Copyright Notice

All contents in the files are protected by copyright law, and all copyrights are reserved by Chengdu Heltec Automation Technology Co., Ltd. (hereinafter referred to as Heltec). Without written permission, all commercial use of the files from Heltec are forbidden, such as copy, distribute, reproduce the files, etc., but non-commercial purpose, downloaded or printed by individual are welcome.

Disclaimer

Chengdu Heltec Automation Technology Co., Ltd. reserves the right to change, modify or improve the document and product described herein. Its contents are subject to change without notice. These instructions are intended for you use.



Content

| | |
|--------------------------------------|----|
| Vision Master E290 | 1 |
| Document version | 2 |
| Copyright Notice | 2 |
| Disclaimer | 2 |
| Content | 3 |
| 1 Description | 4 |
| 1.1 Overview | 4 |
| 1.2 Product features | 5 |
| 2 Pin definition | 6 |
| 2.2 Pin definition | 6 |
| Header J3 | 7 |
| 3 Specifications | 8 |
| 3.1 General specification | 8 |
| 3.2 Power consumption | 9 |
| 3.3 LoRa RF characteristics | 9 |
| 4 Physical dimensions | 10 |
| 5 Resource | 11 |
| 5.1 Relevant resource | 11 |
| 5.2 Heltec Contact Information | 11 |



1 Description

1.1 Overview

Vision Master E290 (HT-VME290) is an E-Ink development kit with multiple wireless drive methods. Collaborate with the sample programs and development tools we provide, users can operate the display via Bluetooth, Wi-Fi and LoRa.

This board is equipped with a default 2.90-inch black and white E-Ink display screen, continuous display for 180 days after power outage. It can be used to develop applications such as electronic tags and identity tags, it is also possible to run open source projects like Meshtastic.

VM-E290 are available in two product variants:


Table 1.1: Product model list

| No. | Model | Description |
|-----|--------------|--|
| 1 | HT-VME290 | Without LoRa Module |
| 2 | HT-VME290-LF | 470~510MHz working LoRa frequency, used for China mainland (CN470) LPW band. |
| 3 | HT-VME290-HF | For EU868, IN865, US915, AU915, AS923, KR920 and other LPW networks with operating frequencies between 863~928MHz. |




1.2 Product features

- ESP32-S3R8, support Wi-Fi, BLE.
- LoRa module is optional, compatible with Mashtastic.
- Default 296 x 128 pixels black-white display, support for partial refresh.
- High contrast, high reflectance, ultra-wide viewing angle.
- Low power consumption, 20uA in deep sleep, continuous display for 180 days after power outage.
- SH1.0-4P sensor interface is perfectly compatible with [QuickLink](#) series sensors.
- 2*20 Pin female header are great for connecting Raspberry PI.
- Compatible with Arduino, we provide [development frameworks and libraries](#).

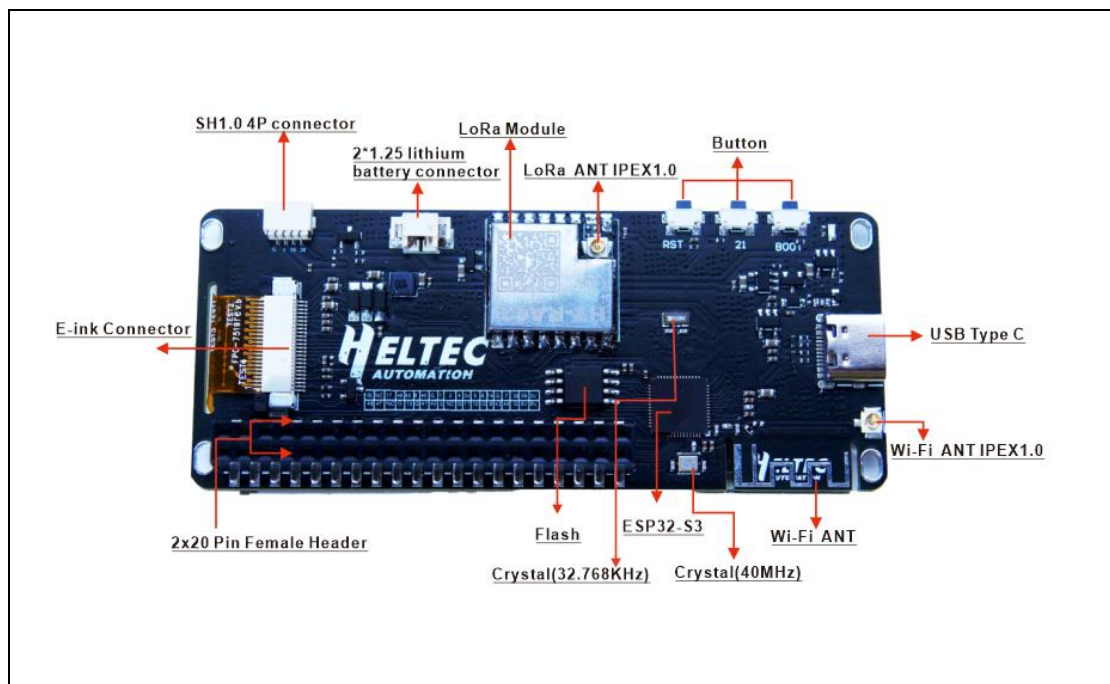



2 Pin definition

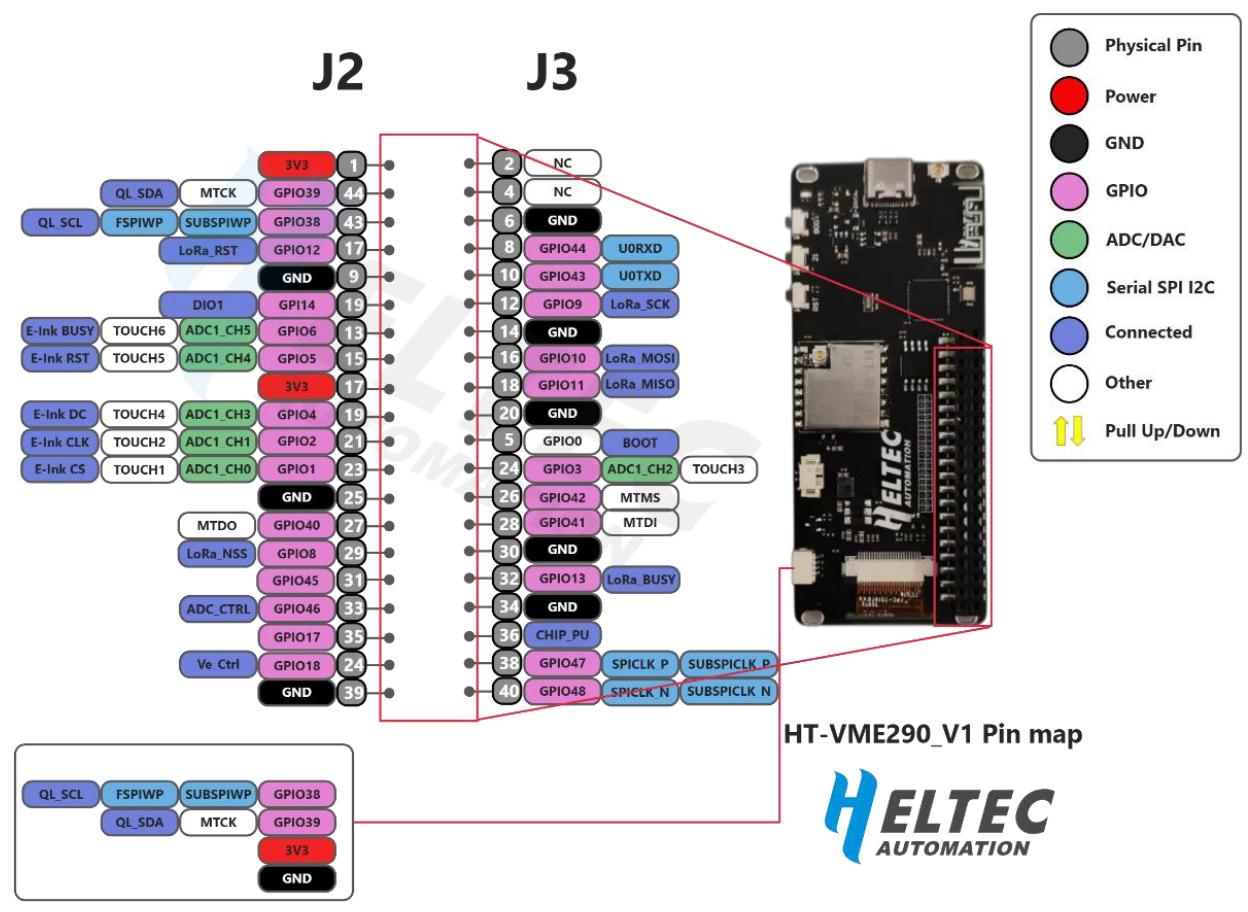

2.2 Pin definition

Header J2

| NO. | Name | Type | Description |
|-----|------|------|--|
| 1 | 3V | P | 3V3 output. |
| 3 | 39 | I/O | GPIO39, MTCK, QL_SDA. ^① |
| 5 | 38 | I/O | GPIO38, SUBSPIWP, FSPIWP, QL_SCL. ^② |
| 7 | 7 | I/O | GPIO7, ADC1_CH6, TOUCH7, VBAT_READ. |
| 9 | G | P | GND. |
| 11 | 14 | I/O | NC. |
| 13 | 6 | I/O | GPIO6, ADC1_CH5, TOUCH6, EINK_BUSY. |
| 15 | 5 | I/O | GPIO5, ADC1_CH4, TOUCH5, EINK_RST. |

^① QL stands for QuickLink Sensor Interface.

^② QL stands for QuickLink Sensor Interface.



| | | | |
|----|----|-----|-------------------------------------|
| 17 | 3V | P | 3V3 output. |
| 19 | 4 | I/O | GPIO4, ADC1_CH3, TOUCH4, E-Ink_D/C. |
| 21 | 2 | I/O | GPIO2, ADC1_CH1, TOUCH2, E-Ink_CLK. |
| 23 | 1 | I/O | GPIO1, ADC1_CH0, TOUCH1, E-Ink_SDI. |
| 25 | G | P | GND. |
| 27 | 40 | I/O | GPIO40, MTDO. |
| 29 | 8 | I/O | GPIO8, LoRa_NSS. |
| 31 | 45 | I/O | GPIO45. |
| 33 | 46 | I/O | GPIO46. |
| 35 | 17 | I/O | GPIO17. |
| 37 | NC | I/O | NC. |
| 39 | G | P | GND. |

Header J3

| NO. | Name | Type | Description |
|-----|------|------|------------------------------------|
| 2 | 5V | P | 5V Input. |
| 4 | 5V | P | 5V Input. |
| 6 | G | P | GND |
| 8 | 44 | I/O | GPIO44, U0RXD. |
| 10 | 43 | I/O | GPIO43, U0TXD. |
| 12 | 9 | I/O | GPIO9, LoRa_SCK. |
| 14 | G | P | GND |
| 16 | 10 | I/O | GPIO10, LoRa_MOSI. |
| 18 | 11 | I/O | GPIO11, LoRa_MISO. |
| 20 | G | I/O | GND. |
| 22 | NC | I/O | NC. |
| 24 | 3 | I/O | GPIO3, ADC1_CH2, TOUCH3, E-Ink_CS. |
| 26 | 42 | I/O | GPIO42, MTMS. |
| 28 | 41 | I/O | GPIO41, MTDI. |
| 30 | G | P | GND. |
| 32 | 13 | I/O | GPIO13, LoRa_BUSY. |
| 34 | G | P | GND. |
| 36 | NC | I/O | NC. |
| 38 | 47 | I/O | GPIO47. |
| 40 | 48 | I/O | GPIO48. |



3 Specifications

3.1 General specification

Table 3.1: General specification

| Parameters | Description |
|-----------------------|--|
| MCU | ESP32-S3R8 |
| LoRa chipset | SX1262 |
| Memory | 384KB ROM; 512KB SRAM; 16KB RTC SRAM; 16MB SiP Flash |
| E-Ink | DEPG0290BNS800F6_V2.1 |
| Display color | Black, White |
| Grayscale | 2 |
| Refresh time | 2 seconds |
| Storage temperature | -25~70°C, <45%rh |
| Operating temperature | 0~50°C |
| Operating Humidity | 0~65%rh |
| Power Supply | 3~5V (USB), 3~4.2(Battery) |
| Screen Size | 2.90 Inch |
| Display Resolution | 128(H)x296(V) Pixel |
| Active Area | 29x67mm |
| Pixel Pitch | 0.227×0.226mm |
| Pixel Configuration | Square |
| Hardware Resource | 6*ADC_1, 1*ADC_2, 6*Touch, 16M*PSRAM, 3*UART; 2*I2C; 2*SPI. Etc. |



| | |
|------------|---|
| Interface | Type-C USB; 2*1.25mm lithium battery interface; LoRa ANT(IPEX1.0); Sensor interface(SH1.0-4P) |
| Dimensions | 88mm*36.6mm*12mm |

3.2 Power consumption

Table 3.2: Working current

| Mode | Condition | Consumption(Battery@3.8V) |
|-------|-----------|---------------------------|
| LoRa | 5dBm | 150mA |
| | 10dBm | 175mA |
| | 15dBm | 200mA |
| | 20dBm | 220mA |
| Wi-Fi | Scan | 105mA |
| | AP | 140mA |
| BT | | 108mA |
| Sleep | | 18uA |

3.3 LoRa RF characteristics

3.3.1 Transmit power

Table3-5-1: Transmit power

| Operating frequency band | Maximum power value/[dBm] |
|--------------------------|---------------------------|
| 470~510 | 21 ± 1 |
| 867~870 | 21 ± 1 |
| 902~928 | 21 ± 1 |

3.5.2 Receiving sensitivity

The following table gives typically sensitivity level.

<https://heltec.org>



Table3-5-2: Receiving sensitivity

| Signal Bandwidth/[KHz] | Spreading Factor | Sensitivity/[dBm] |
|------------------------|------------------|-------------------|
| 125 | SF12 | -135 |
| 125 | SF10 | -130 |
| 125 | SF7 | -124 |

3.5.3 Operation Frequencies


HT-VME290 supports LoRaWAN frequency channels and models corresponding table.

Table3-5-3: Operation Frequencies

| Region | Frequency (MHz) | Model |
|--------|-----------------|--------------|
| EU433 | 433.175~434.665 | HT-VME290-LF |
| CN470 | 470~510 | HT-VME290-LF |
| IN868 | 865~867 | HT-VME290-HF |
| EU868 | 863~870 | HT-VME290-HF |
| US915 | 902~928 | HT-VME290-HF |
| AU915 | 915~928 | HT-VME290-HF |
| KR920 | 920~923 | HT-VME290-HF |
| AS923 | 920~925 | HT-VME290-HF |

4 Physical dimensions

Unit: mm

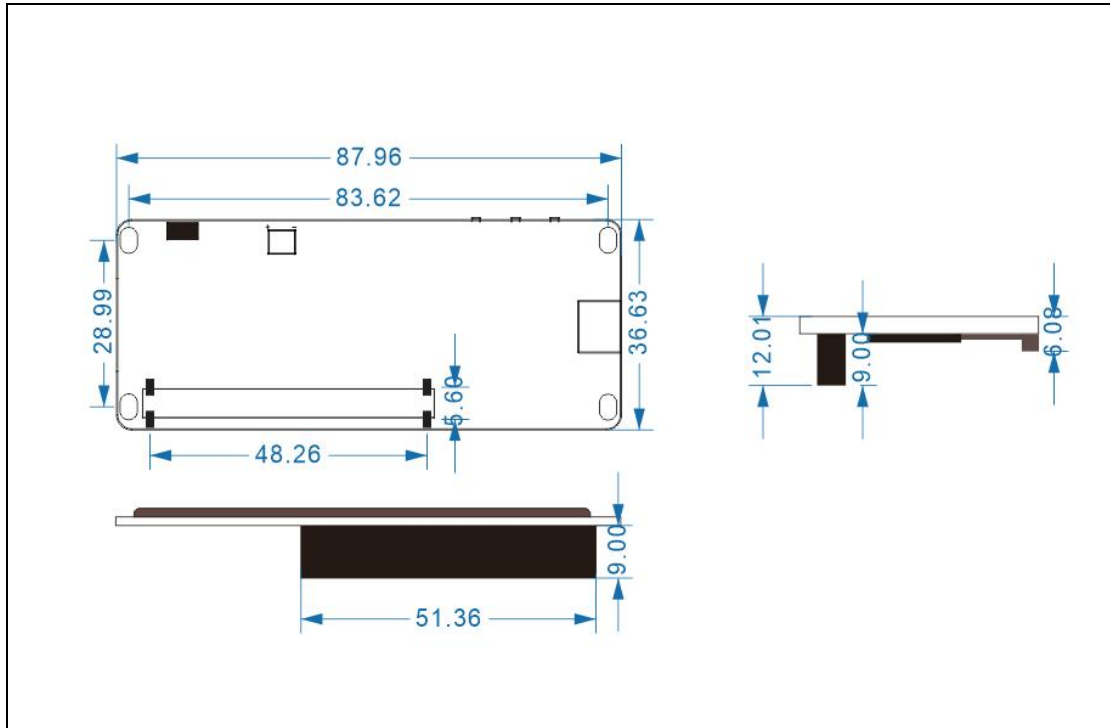

5 Resource

5.1 Relevant resource

- [Heltec ESP32 framework and Lib](#)
- [Heltec LoRaWAN test server based on TTS V3](#)
- [SnapEmu IoT platform](#)
- [User Manual Document](#)
- [E-Ink Datasheet](#)
- [Schematic Diagram](#)

5.2 Heltec Contact Information

Heltec Automation Technology Co., Ltd

Chengdu, Sichuan, China

Email: support@heltec.cn

<https://heltec.org>



Phone: +86-028-62374838

<https://heltec.org>

<https://heltec.org>

Documents

Rev. 1.0

P 12/12

May 2023

Heltec Automation © Limited standard files